


| Unspecified linear dimension tolerance (mm) | | | | | | | |
|---|---|---|---|---|---|---|---|
| Tolerance class | Basic size | | | | | | |
| | 0.5~3 | 3~6 | 6~3 | 30~120 | 120~400 | 400~1000 | 1000~2000 |
| f | ±0.05 | ±0.05 | ±0.1 | ±0.15 | ±0.2 | ±0.3 | |
| m | ±0.1 | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.8 | |
| c | ±0.2 | ±0.3 | ±0.5 | ±0.8 | ±1.2 | ±2 | |
| ISO 2768-1 CLASS C(GB/T 1804 CLASS C) | | | | | | | |

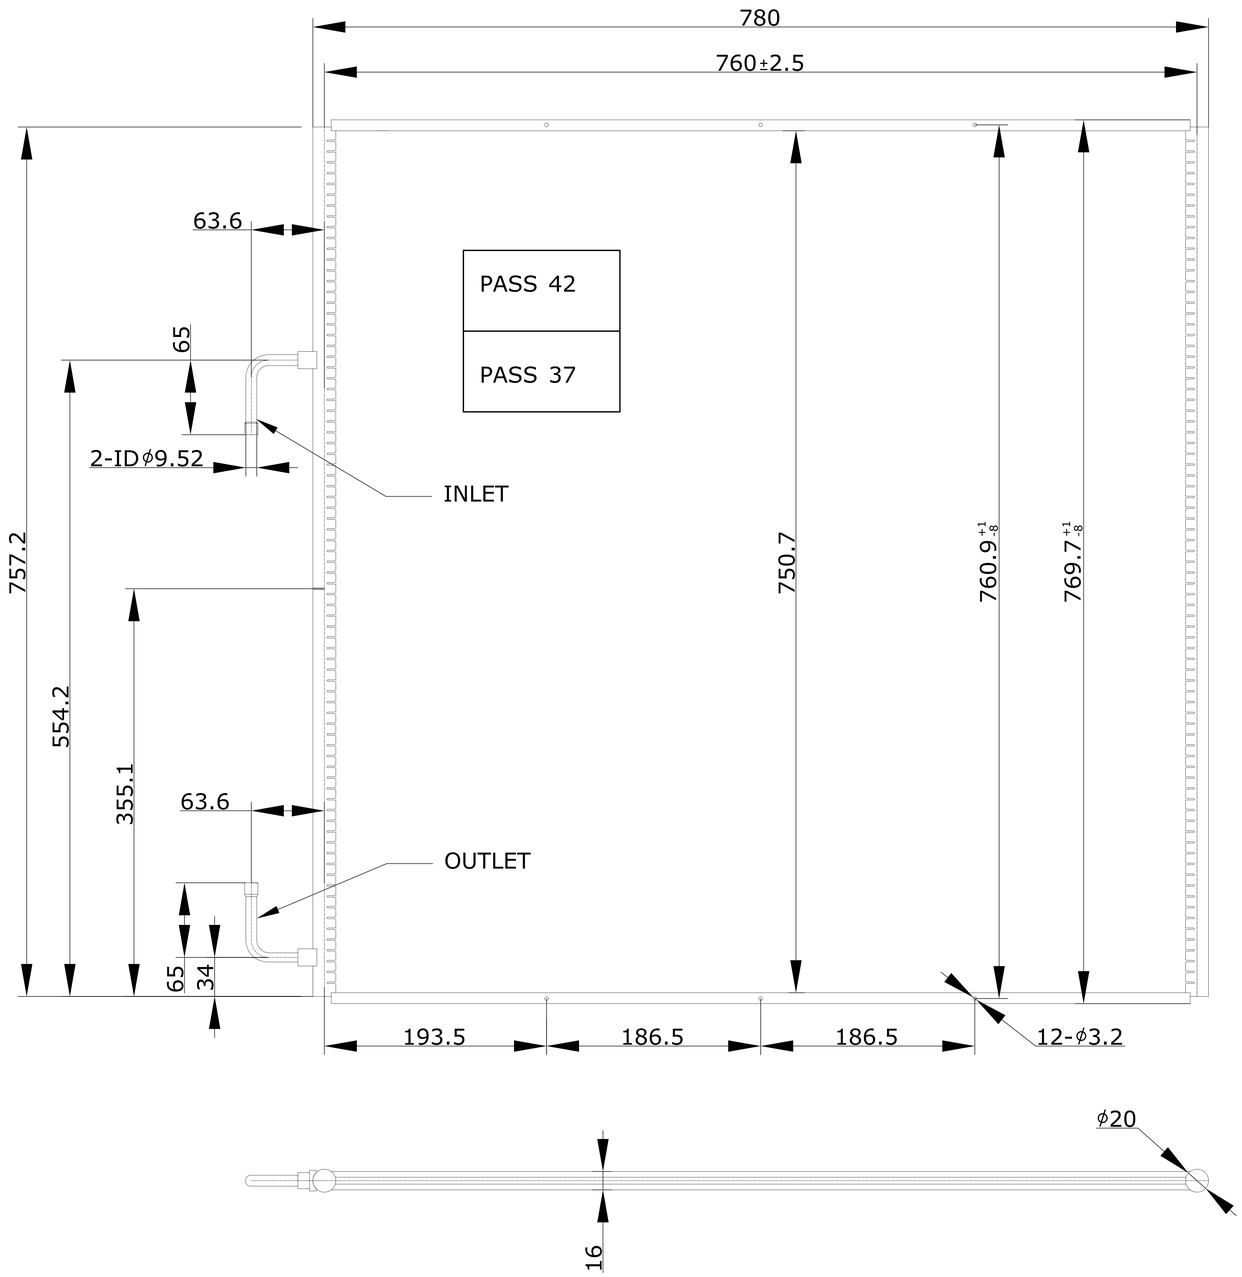


NOTES
1 DESIGN PRESSURE 4.5MPA;
2 THE MINIMUM BURST PRESSURE OF THE PRODUCT IS THREE TIMES THE DESIGN PRESSURE
3 DIAGONAL DIFFERENCE MAX 7mm;
4 TOLERANCE IF NOT SPECIFIED SHALL COMPLY WITH STANDARD ISO 2768-1 CLASS C(GB/T 1804 CLASS C)
5 SEAL 0.01~0.05MPA NITROGEN GAS IN THE PRODUCT
6 OTHER STANDARDS JB/T11967 EN378-2.
7 THE INLET AND OUTLET PIPES ARE COPPER PIPES

| PRODUCT PARAMETERS | |
|---|---|
| TUBE NUMBER | 79 |
| TUBE TYPE | 16*1.3-16 |
| TUBE MATERIAL (LONG USING LIFE ALLOY) | LLA9153(3F03)+Zn- H112 |
| MANIFOLD TYPE | ⌀20 |
| FIN TYPE | LOUVERED 16*0.08 FPI 23 |
| FIN MATERIAL | AA4343/3003/4343 |
| PASS | 42/37 |

Change log

| | | Modify content |
|---|---|---|
| | | |

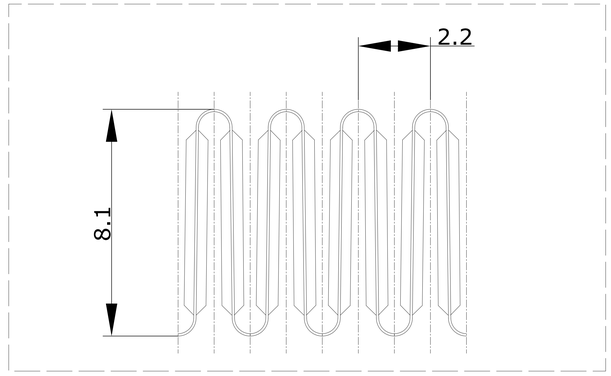ридан

DESCRIPTIN: Microchannel heat exchanger

MODEL: RC-1400-I

REV. C

VIEW

CODE: 021U0091R

CREAT:

AUDIT:

APPROVED BY CUSTOMER SIGNATURE:

PROCESS:

APPROVE: