
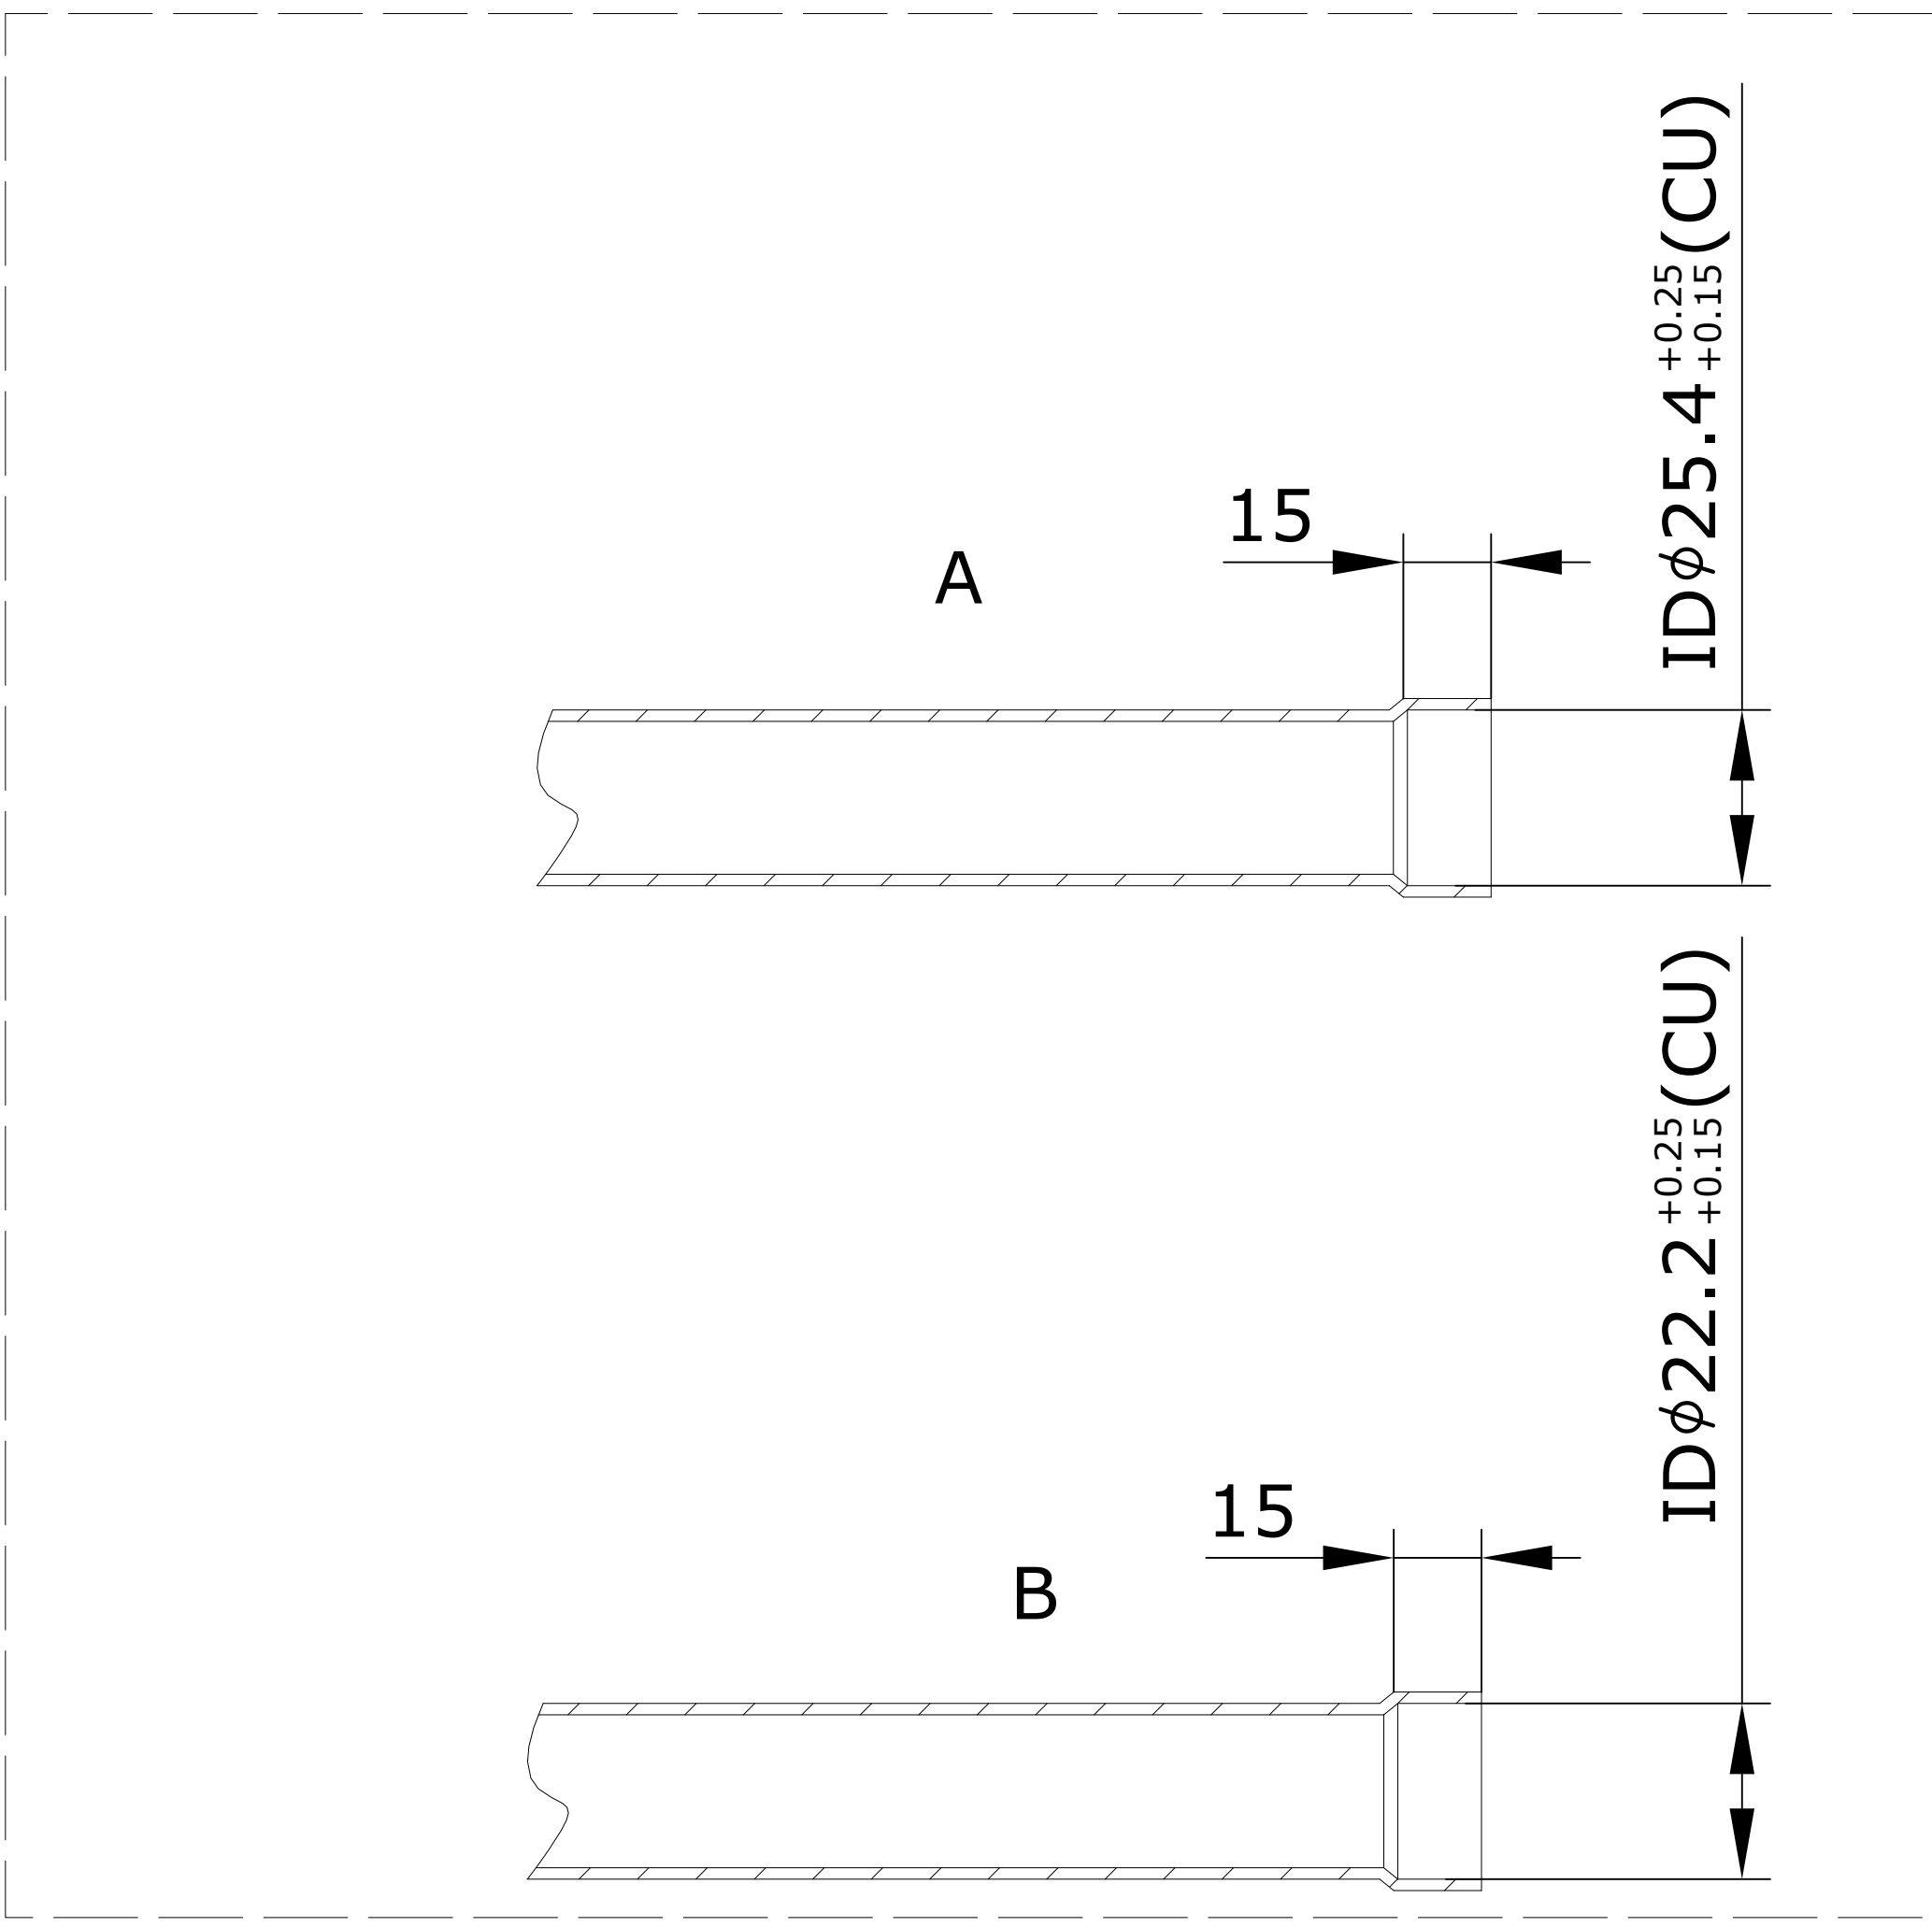


| |
|---------|
| 69 Pass |
| 34 Pass |

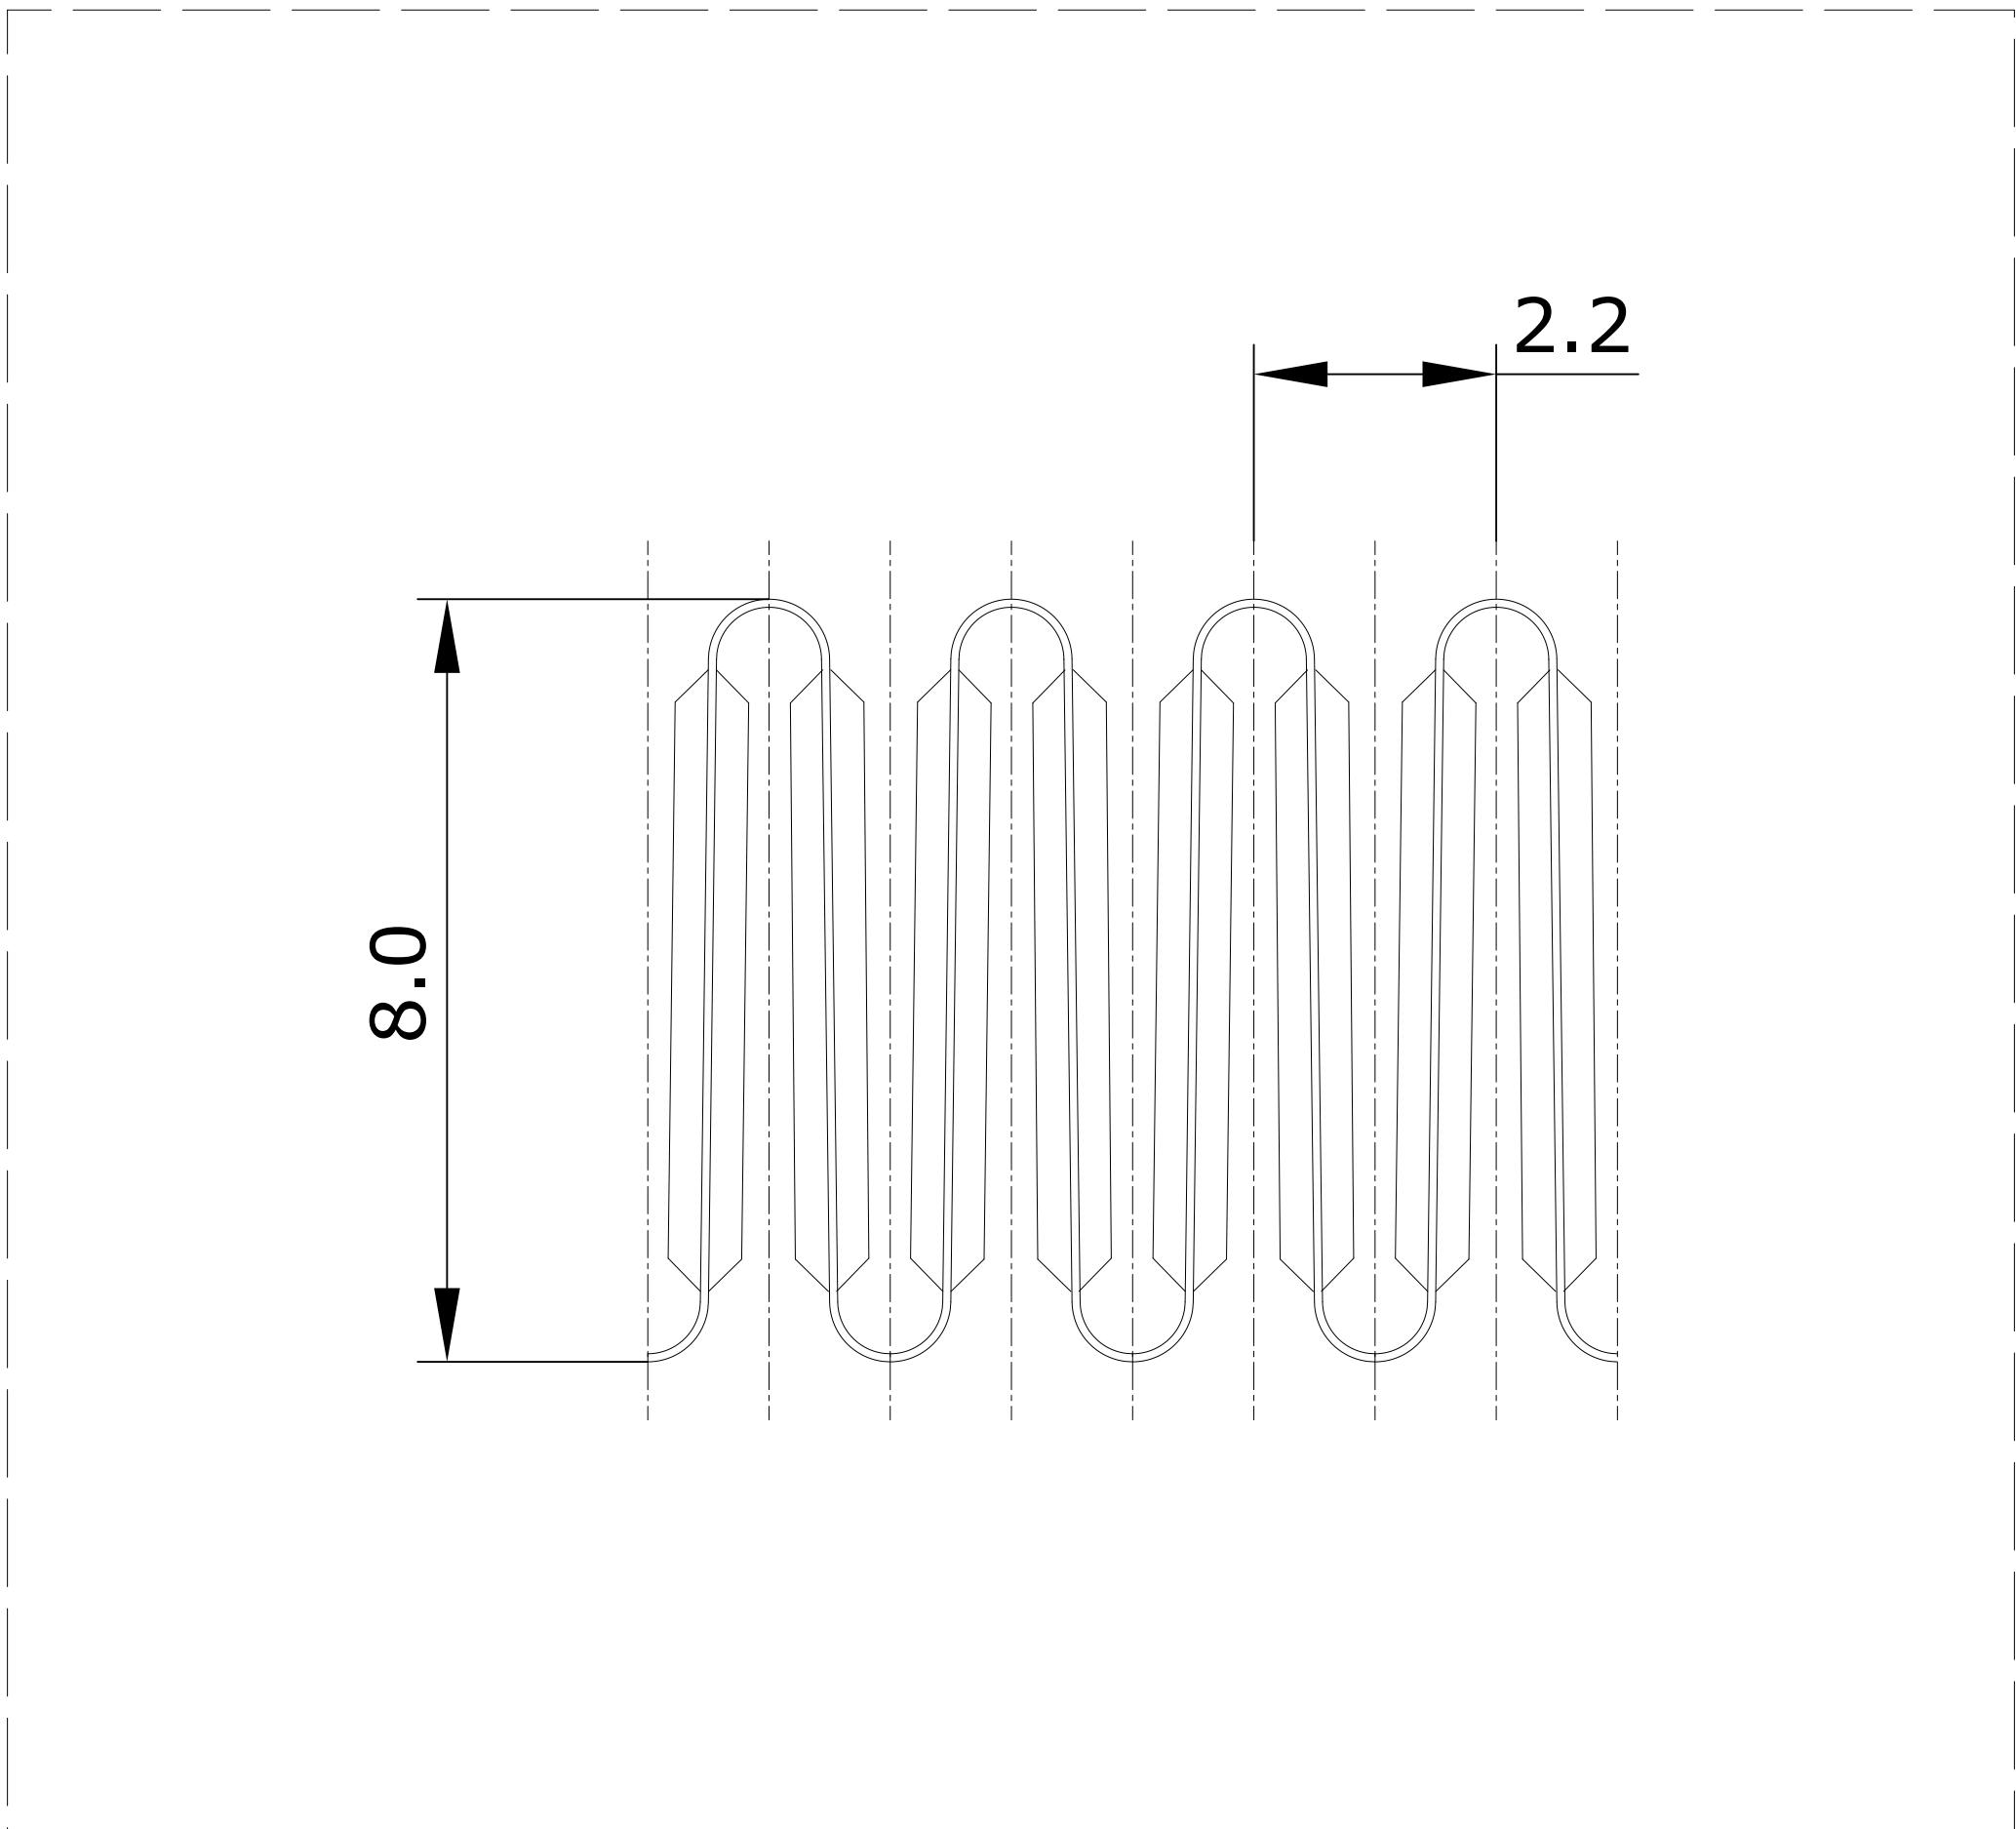

- NOTES**
- DESIGN PRESSURE 4.5MPA
 - THE MINIMUM BURST PRESSURE OF THE PRODUCT IS THREE TIMES THE DESIGN PRESSURE
 - DIAGONAL DIFFERENCE MAX 11mm
 - TOLERANCE IF NOT SPECIFIED SHALL COMPLY WITH STANDARD ISO 2768-1 CLASS C(GB/T 1804 CLASS C)
 - SEAL 0.01~0.05MPA NITROGEN GAS IN THE PRODUCT
 - OTHER STANDARDS JB/T11967 EN378-2
 - THE INLET AND OUTLET PIPES ARE COPPER PIPES

PRODUCT PARAMETERS

| | |
|-------------------------|---------------------------|
| TUBE NUMBER | 103 |
| TUBE TYPE | 25.4*2- 20 |
| TUBE MATERIAL | LLA9153(3F03)+Zn- H112 |
| (LONG USING LIFE ALLOY) | |
| MANIFOLD TYPE | φ38 |
| FIN TYPE | LOUVERED 25.4*0.08 FPI 23 |
| FIN MATERIAL | AA4343/3003/4343 |
| PASS | 69/34 |



| | | |
|--|---|----------------------|
| UNMARKED TOLERANCE X ±1.5 X.X ±1 X.XX ±0.5 ∠ ±1° | DESCRIPTION: Microchannel heat exchanger | |
| | MODEL: RC-2000-S | REV. A |
| VIEW ⊕ □ | CODE: 021U0264R | CREAT: AUDIT: |
| | APPROVED BY CUSTOMER SIGNATURE: | PROCESS: APPROVE: |